



## Galvanized Steel Hose Combination Nipple To Contact Hose Pipes

Our Product Introduction

### Basic Information

- Place of Origin: CHINA
- Brand Name: DEYE
- Certification: ISO9001:2015 PED
- Model Number: DY-NIP-C16
- Minimum Order Quantity: 100PCS
- Price: USD0.5-USD3 each
- Packaging Details: carton box+ pallets
- Delivery Time: 7 days for stock items, 30 days for newly produced items
- Payment Terms: T/T, L/C, D/P
- Supply Ability: 100000pcs one month



### Product Specification

- Thread: ANSI B.1.20.1 DIN 2999, ISO 7/1, ISO 228, NPT, BSPT, BSP
- Thickness: Sch20, Sch40, Sch80, Sch120, Sch160,xs, Xxs, Customize
- Size: 1/4" To 6" 8MM-DN150MM
- Length: 1/2"-12" 15mm-300mm, Longer As Per Customize
- Material: A106GR.B, A53GR.B, API5L GR.B Stainless Steel
- Surface: Black, Sandblast, Pickling, Anti-rust Oil, Zinc Plated, Galvanized.
- Highlight: **Zinc Coated Galvanized Steel Hose, 6in Galvanized Steel Hose, BSPT nipple and socket**

for more products please visit us on [piping-industry.com](http://piping-industry.com)

## Product Description

### GALVANIZED STEEL HOSE COMBINATION NIPPLE TO COECT HOSE PIPES

Combination nipples are most commonly used for water suction and discharge hoses. However, the availability of a wide variety of materials

has made them useful in many marine, chemical, and food applications. Combination Nipples are not for use with heavy duty/high pressure air,

steam, or any critical/harmful applications as they could result in coupling blow-off due to the shape and design of the barbs.

The maximum rated working pressure varies with the size, application, construction of the hose, type of clamps used, and with the method


of installation. As a general rule, these are not recommended for pressures exceeding 50-75psi (varies on coupling method and size),

and absolutely not recommended for critical applications where failure would result in damage to personnel, property, or the

environment

#### Product Information/Product Description/Basis Information/Specification

Products Name	ZINC COATED GALVANIZED STEEL HOSE COMBINATION NIPPLE TO COECT HOSE PIPES
Types	Close Nipple, long nipple, barrel Nipple, Swage Nipples, TBE nipple, PLE nipple, TSE nipple, BLE nipple, TLE Nipple, PSE nipple
Size	1/8"-6"
Wall Thickness	SCH20 ,SCH30,STD,SCH40S,SCH60,XS,SCH80S,SCH100,SCH120,,SCH160S,X XS ,DIN, SGP JIS thickness
Connection	<b>Threaded Ends NPT, BSPT, BSPP ANSI B1.20.1, BS21, DIN2999</b>
Design Standard	<b>ASTMA733 DIN2982 DIN2988 BS3187 EN10241:2000</b>
Material Grade	<b>Carbon Steel A106GR.B A53GR.B, ST37 RST37.2</b>
	<b>Stainless Steel304, 304L, 304H, 316, 316L, 316H, 310, SS321, SS321H, 347, 347H, 904L</b>
	<b>Duplex SS 2507, DSS2205, UNS31803 UNS32750 UNS32760</b>
	<b>1.4301,1.4306, 1.4401, 1.4435, 1.4406, 1.4404, 1.4462, 1.4410, 1.4501</b>
Surface	Black, Electric Galvanized, Cold Galvanized, Hot. Dipped Galvanized, zinc Plated

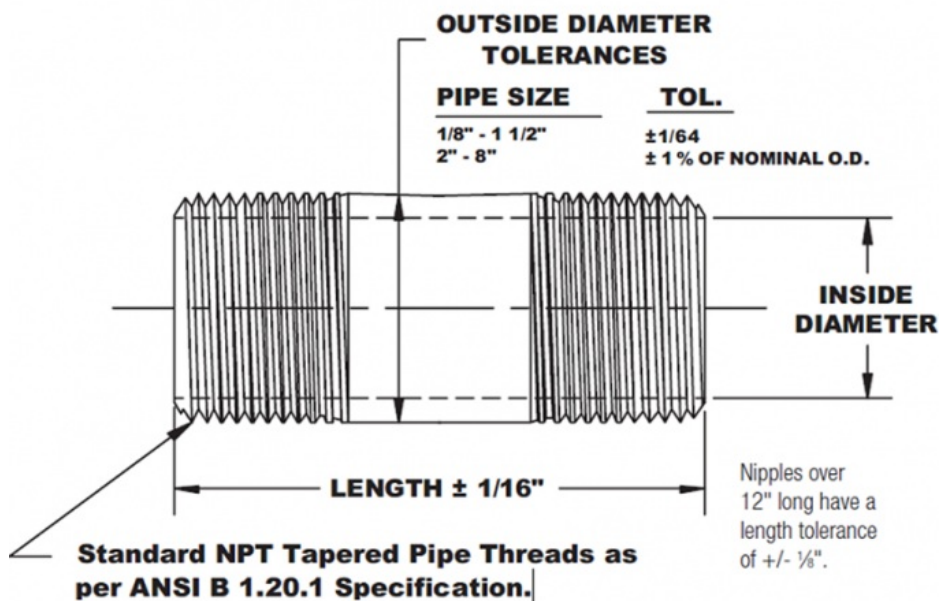

NPS	OD	L	Pipe Nipple Lengths
in	in	in	

1/8	0.405	3/4	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
1/4	0.54	7/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
3/8	0.675	1	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
1/2	0.84	1 1/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
3/4	1.05	1 3/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
1	1.315	1 1/2		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
1 1/4	1.66	1 5/8		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
1 1/2	1.9	1 3/4		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
2	2.375	2			2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
2 1/2	2.875	2 1/2				3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
3	3.5	2 5/8				3	3 1/2	4	4 1/2	5	5 1/2	6	8	10	12
4	4.5	2 7/8						4	4 1/2	5	5 1/2	6	8	10	12
5	5.563	3							4 1/2	5	5 1/2	6	8	10	12
6	6.625	3 1/8							4 1/2	5	5 1/2	6	8	10	12

**EN 10241:2000 BSPT BSPP**

SIZE	Type 01				Type 02			
	OD	Thick	Length	Weight	OD	Thicknes s	Length	Weight
1/8"	14.0	2.7	17	0.023	15.000	3.200	19.000	0.018
1/4"	18.5	3.2	25	0.028	18.500	3.530	27.000	0.034
3/8"	21.3	3.2	26	0.032	22.000	3.530	28.000	0.041
1/2"	26.4	3.8	34	0.069	27.000	4.180	37.000	0.074
3/4"	31.8	3.8	36	0.092	32.500	4.190	39.000	0.104
1"	39.5	4.6	43	0.157	39.500	4.660	46.000	0.153
1-1/4"	48.3	4.7	48	0.240	49.000	5.020	51.000	0.240
1-1/2"	54.8	4.7	48	0.251	56.000	5.580	51.000	0.340
2"	66.3	4.8	56	0.388	68.000	5.670	60.000	0.501
2-1/2"	82.0	4.9	65	0.494	84.000	5.900	69.000	0.742
3"	95.0	5.0	71	0.615	98.000	6.540	75.000	0.957
4"	122.0	6.0	83	1.175	124.000	6.970	87.000	1.579
5"	147.0	6.0	92	1.530	151.000	7.760	96.000	2.306
6"	174.0	6.5	92	1.900	178	8.57	96	3.310

**Features /Characteristics**

Steel Pipe used for Schedules 40 & 80 welded nipples conforms to ASTM A53  
Steel Pipe used for Schedule 80 nipples conforms to ASTM A106 Grade B  
Both welded and seamless steel nipples conform to ASTM A733  
NPT threads on all nipples conform to ASME B1.20.1  
Independent lab verification that fittings meet applicable chemical & physical propert

**Application and usage**

Electric power, oil and gas, petrochemical, chemical, marine, heating,  
Metallurgy

**Reference Standards**

ASME B16.9 Specification for Butt Welded Fittings  
ASME B16.9 specification is designed for butt welded fittings applied in industrial construction pipelines. Including elbow, tee, cross, cap, reducer, and etc.

**Standard Scope**

**The standard includes specifications of NPS 1/2 to NPS 48 (DN15-DN1200) factory-made wrought butt-welded pipe fittings overall dimensions, tolerances ratings, test methods and markings.**

#### **Special Fittings**

**Special fittings here refer to special sizes, forms and tolerances that agreed between buyer and manufacturer.**

#### **Fabricated Fittings**

**Fabricated laterals and other fittings by circumferential or intersection welds are considered pipe fabrication could not apply this standard.**

**Units under ASME B16.9 shall be stated in both SI (Metric) and U.S. Customary units. Designation for size is NPS.**

#### **Reference Standards**

It is not considered practical to identify the specific edition of each standard and specification in the individual references. A product made comply with a prior edition of referenced standards and in all other respects conforming to this standard will be considered complied.

ASME B16.5: Pipe Flanges and Flanged Fittings: NPS 1/2 Through NPS 24 Metric/Inch Standard

ASME B16.25: For Buttwelding Ends

ASME B31: Code for Pressure Piping

ASME B31.3: Process Piping

ASME B36.10M, Welded and Seamless Wrought Steel Pipe

ASME B36.19M, Stainless Steel Pipe

ASME Boiler and Pressure Vessel Code

ASTM A234/A234M-17, Specification for Piping Fittings of Wrought Carbon Steel and Alloy Steel for Moderate and High Temperature Service

ASTM A403/A403M-16, Specification for Wrought Austenitic Stainless Steel Piping Fittings

ASTM A420/A420M-16, Specification for Piping Fittings of Wrought Carbon Steel and Alloy Steel for Low Temperature Service

ASTM A815/A815M-14e1, Specification for Wrought Ferritic, Ferritic/Austenitic and Martensitic Stainless Steel Piping Fittings

ASTM A960/A960M-16a, Specification for Common Requirements for Wrought Steel Piping Fittings

ASTM E29-13, Practice for Using Significant Digits in Test Data to Determine Conformance With Specifications

ASTM B361-16, ASTM B363-14, ASTM B366/B366M-17: For other material metals. (Aluminum, Titanium, Nickel, and alloy).

#### **Our Service**

1. Technical support
2. Raw Material Quality control.
3. Inspection during the production time.
4. Final Test includes Surface, Dimension, PT Test, RT test, ultrasonic Test
5. Test Report each shipment
4. Flexible Delivery terms. EXW FOB CIF CFR DDP DDU
5. Flexible payment Ways: LC. TT. DP
6. Customized Package includes Logo. Cases Dimension.
7. 18 months quality Guarantee time.
9. Free replacement by air if any error founded
10. 24 hours to Feedback your questions

 **SHIJIAZHUANG DEYE PIPING INDUSTRY CO., LTD Pipefittings Department**



+8613292824811



sales@deyepiping.com



pipng-industry.com

No. 368 Youyi St. Shijiazhuang, Hebei, China