



150PSI Stainless Steel Threaded Y WYE Tee for pipefittings use

Our Product Introduction

for more products please visit us on piping-industry.com

Basic Information

- Place of Origin: China
- Brand Name: DEYE
- Certification: ISO9001:2015 PED
- Model Number: STH-TH-11
- Minimum Order Quantity: 10pcs
- Price: USD0.5-USD50 for each pc
- Packaging Details: Cartons+Ply-wooden cases, Pallets
- Delivery Time: 7 days for stock items
- Payment Terms: T/T, L/C, D/P
- Supply Ability: 1000000PCS one month



Product Specification

- Thread: DIN 2999, ISO 7/1, ISO 228, NPT, BSPT, BSP
- Casting: Investment Casting
- Material: 304/304L, 316/316L
- Size: 1/4"-4"
- Highlight: Threaded Pipe Fittings Stainless Steel, Threaded Pipe Fittings BSPT, Stainless Steel y tee



More Images



Product Description

150PSI BSPT STAINLESS STEEL THREADED PIPE FITTINGS with WYE Y TEE













Y Type Tee (pip fittings), Stainless Steel cast Fittings, integrated formed pipe fittings shape is like a letter Y, branch pipe and main outlet 45° /60 ° angle, Pipe wyes are similar to pipe tees. The only difference is in that the branch line is angled to reduce friction which could hamper the flow. The pipe connection is typically at a 45-degree angle rather than a usual 90-degree angle. If a branch turns out at the end to be perpendicular to the through line, the pipe fitting becomes a "tee wye".

Pipe wyes are used to allow one pipe to join another pipe at some degree or angle. As the name suggests, the pipe wyes are Y-shaped pipe fitting devices. They are a popular type of pipe fitting used in various industrial applications.

Product Information/Product Description/Basis Information/Specification

Description	Stainless steel threaded NPT BSPT Fittings
Product name	threaded NPT BSPT 150PSI Elbows, Reducers, Coupling, Plug, Bushing, Union, Tee, cross, caps Stainless Steel Screwed Pipe Fittings Threaded Pipe Fittings Union, Hex Nipple, bushing, reducer socket, 45 90 degree elbow, Square Head plug, coupling, Y pipe joints tee
Size	1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 5" 6" 8"
Gasket	NBR, FKM
Thread	BSPT, BSPP, NPT, PS, DIN
Material	stainless steel 201, 202, stainless steel 304, stainless steel 316
Casting Method	Investment precision casting, CNC machine
Application	Oil, Water, Industrial, Chemical
Test pressure	Usually 150PSI
Package	pcs/polybag, polybag/carton, cartons/pallet or according to your requirement
Advantages	1. OEM and Customized service can be provided 2. With experience, quality guaranteed 3. Approved by ISO9001:2015 4. With independent open mold capacity, OEM supposed


Technology/ Technical Data Sheets

					
90° Elbow	90° Street Elbow	45° Elbow	Tee	Cross	Hex. Nipple
					
Hex. Plug	Square Plug	Hex. Cap	Round Cap	Coupling (Socket)	Half Coupling

SIZE	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12
1/8"	16	18	16	17	25	22	18	17	13	-	-	-
1/4"	19	19	19	20	30	30	18	21	15	15	25	11
3/8"	24	20	25	24	34	31	19	23	17	17	26	12
1/2"	25.5	20	28	26	37	35	22	24	19	17.5	32	15
3/4"	29.5	23	32	30	43	39	24	25	18	20.5	33	17
1"	36	26	39	36	51	45	27	27	20.5	23.5	38	19
1-1/4"	43.5	30	45	44	59	48	26	34.5	22	25.5	44	22

1-1/2"	46.5	33	49	47	64	50	29.5	35.5	23	26.5	44	23
2"	55.5	38	57	54	74	57	32	36	25.5	28	50	25
2-1/2"	66	45	69	66	90	64	36.5	43	28.5	31	58	29
3"	74	52	-	74	99	70	37.5	46.5	30.5	33	66	33
4"	90	64	-	90	115	79	42	52	38.5	37	72	36

Production Process

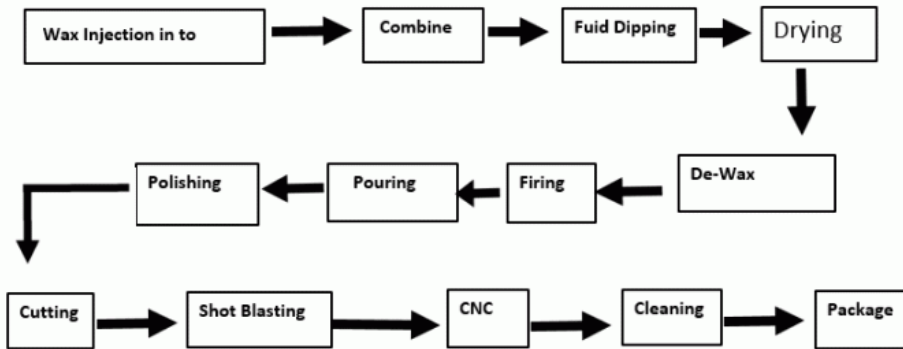

Common used Material Grade

SS316 Chemical Composition

ASTM A351 CF8M, SS316 Chemical Composition in %

ASTM A351 CF8M, SS316 Chemical Composition in %

	C	Mn	P	S	Si	Ni	Cr	Mo
Min.						9.0	18.0	2.00
Max.	0.080	1.500	0.040	0.040	1.500	12.0	21.0	3.00

SS316 Mechanical Properties of the Fittings at room temperature

SS316/S316L	Tensile Strength Rm (N/mm2)	Upper Yield Point ReH (N/mm2) min.	Elongation at rupture A5 (%) min.	Hardness Test (HRB)
Min.	485	205	30	
Max.				80

SS304 Chemical Composition

ASTM A351 CF8, SS304 Chemical Composition in %

	C	Mn	P	S	Si	Ni	Cr	Mo
Min.						8.0	18.0	
Max.	0.080	1.500	0.040	0.040	2.000	11.0	21.0	0.50

SS304 Mechanical Properties of the Fittings at room temperature

SS304/S304L	Tensile Strength Rm (N/mm2)	Upper Yield Point ReH (N/mm2) min.	Elongation at rupture A5 (%) min.	Hardness Test (HRB)
Min.	485	205	35	
Max.				

Application/ Usage:

Threaded pipe fittings are commonly used in Water gas pipes, small diameter water pipes, compressed air pipes and low-pressure steam pipes.

DEYE SHIJIAZHUANG DEYE PIPING INDUSTRY CO., LTD Pipefittings Department

+8613292824811 sales@deyepiping.com piping-industry.com

No. 368 Youyi St. Shijiazhuang, Hebei, China