150# Investment casting theaded pipe fittings With Hose Nipple

Basic Information

Place of Origin: ChinaBrand Name: DEYE

• Certification: ISO9001:2015 PED

Model Number: STH-TH-15Minimum Order Quantity: 10pcs

• Price: USD0.5-USD50 for each pc

• Packaging Details: Cartons+Ply-wooden cases, Pallets

• Delivery Time: 7 days for stock items

• Payment Terms: T/T, L/C, D/P

• Supply Ability: 1000000PCS one month



Product Specification

• Thread: DIN 2999, ISO 7/1, ISO 228, NPT, BSPT,

BSP

Casting: Investment CastingMaterial: 304/304L, 316/316L

• Size: 1/4"-4"

• Highlight: Threaded Pipe Fittings NPT,

DIN 2999 Threaded Pipe Fittings,

316L Hose Nipple



More Images



Product Description


150# Investment casting theaded pipe fittings With Hose Nipple

Hose Nipples with threaded x hose barb in 304 stainless steel and 316 stainless steel, can connect hose Pipes by one ends and connect stainless steel pipes in the other ends. A straight-type stainless steel hex socket hose nipple fitting (screw-in) from Kitz. The material is SCS13A (lost-wax). Stainless steel displays the same excellent corrosion-resistance and durability of chrome and nickel. The hose connection type is a bamboo-shoot shape and the connection screw type is R-shaped

Product Information/Product Description/Basis Information/Specification


Description	150# Investment casting theaded pipe fittings With Hose Nipple
Product name	threaded NPT BSPT 150PSI Elbows, Reducers, Coupling, Plug, Bushing, Union, Tee, cross, caps Stainless Steel Screwed Pipe Fittings Threaded Pipe Fittings Union, Hex Nipple, bushing, reducer socket, 45 90 degree elbow, Square Head plug, coupling, Y pipe joints tee
Size	1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 5" 6" 8"
Gasket	NBR, FKM
Thread	BSPT,BSPP, NPT,PS , DIN
Material	stainless steel201,202, stainless steel304, stainless steel 316
Casting Method	Investment precision casting, CNC machine
Application	Oil, Water, Industrial, Chemical
Test pressure	Usually 150PSI
Package	pcs/polybag, polybag/carton, cartons/pallet or according to your requirement
	OEM and Customized service can be provided
Advantages	With experience, quality guaranteed
	3. Approved by ISO9001:2015
	With independent open mold capacity, OEM supposed

Technology/ Technical Data Sheets

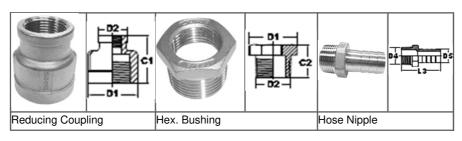

SIZE		-C1	C2	SIZE		C1	C2
D1	D2	10'	02	D1	D2	01	
1/8"	-	-	-	1-1/4"	1/8"-1	44	26
1/4"	1/8"	27	18	1-1/2"	1/8"-1-1/4"	48	29.5
3/8"	1/8"-1/4"	34	19	2"	1/8"-1-1/2"	56	32
1/2"	1/8"-3/8"	36	22	2-1/2"	1/8"-2"	62	36.5
3/4"	1/8"-1/2"	35	24	3"	1/8"-2-1/2"	67	37.5
1"	1/8"-3/4"	40	27	4"	1/8"-3"	76	42

Production Process

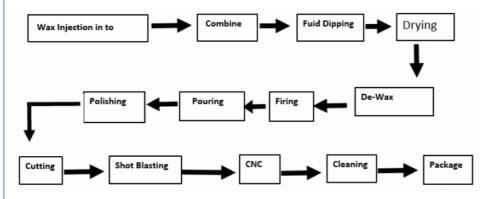

Common used Material Grade

SS316 Chemical Composition ASTM A351 CF8M, SS316 Chemical Composition in % ASTM A351 CF8M, SS316 Chemical Composition in %

	C	Mn	P	S	Si		Cr	Мо
Min.						9.0	18.0	2.00
Max.	0.080	1.500	0.040	0.040	1.500	12.0	21.0	3.00

SS316 Mechanical Properties of the Fittings at room temperature

			Elongation at rupture	
SS316/S	Tensile Strength	Upper Yield Point ReH	A5	Hardness Test
S316L	Rm (N/mm2)	(N/mm2) min.	(%)	(HRB)
			min.	
Min.	485	205	30	
Мах.				80

SS304 Chemical Composition

ASTM A351 CF8, SS304 Chemical Composition in %										
	C Mn P S Si Ni Cr Mo									
Min.						8.0	18.0			
Max.	0.080	1.500	0.040	0.040	2.000	11.0	21.0	0.50		

SS304 Mechanical Properties of the Fittings at room temperature

	, ,	Upper Yield Point ReH (N/mm2) min.		Hardness Test (HRB)
Min.	485	205	35	
Max				

Application/ Usage:
Threaded pipe fittings are commonly used in Water gas pipes, small diameter water pipes, compressed air pipes and lowpressure steam pipes.

SHIJIAZHUANG DEYE PIPING INDUSTRY CO., LTD Pipefittings Department)

+8613292824811

sales@deyepiping.com

piping-industry.com

No. 368 Youyi St. Shijiazhuang, Hebei, China