SS316 SS304 150PSI Screw Threaded Pipe Fittings for SS Heavy Hex Bushing

Basic Information

Place of Origin: ChinaBrand Name: DEYE

• Certification: ISO9001:2015 PED

Model Number: STH-TH-25Minimum Order Quantity: 10pcs

• Price: USD0.5-USD50 for each pc

• Packaging Details: Cartons+Ply-wooden cases, Pallets

• Delivery Time: 7 days for stock items

• Payment Terms: T/T, L/C, D/P

• Supply Ability: 1000000PCS one month



Product Specification

• Thread: DIN 2999, ISO 7/1, ISO 228, NPT, BSPT,

BSP

Casting: Investment CastingMaterial: 304/304L, 316/316L

• Size: 1/4"-4"

• Highlight: SS304 Threaded Pipe Fittings,

SS316 Threaded Pipe Fittings,

ss npt fittings 316L




Product Description

SS316 SS304 150PSI Screw Threaded Pipe Fittings for SS Heavy Hex Bushing

Class 150 stainless steel 304/316 cast pipe fitting hex bushing with male National Pipe Taper (NPT) threads on one end and female NPT threads on the other end for connecting pipes of different sizes. NPT and FNPT threads conform to ASME B1.20.1 This pipe fitting also has a hexagonal head for increased leverage and use with a wrench, The ss hex bushing Stainless castings conform to ASTM A351 ACI Grade CF8 (304) & ACI Grade CF8M (316), the stainless steel hex. bushing is Maximum Pressure: 300 psi @ 72 F;150 psi @ 366 F for steam


| Product Information/Product Description/Basis Information/Specification | | | | | | | |
|---|--|--|--|--|--|--|--|
| Description | SS316 SS304 150PSI Screw Threaded Pipe Fittings for SS Heavy Hex Bushing | | | | | | |
| Product name | threaded NPT BSPT 150PSI Elbows, Reducers, Coupling, Plug, Bushing, Union, Tee, cross, caps Stainless Steel Screwed Pipe Fittings Threaded Pipe Fittings Union, Hex Nipple, bushing, reducer socket, 45 90 degree elbow, Square Head plug, coupling, Y pipe joints tee | | | | | | |
| Size | 1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 5" 6" 8" | | | | | | |
| Gasket | NBR, FKM | | | | | | |
| Thread | BSPT,BSPP, NPT,PS , DIN | | | | | | |
| Material | stainless steel201,202, stainless steel304, stainless steel 316 | | | | | | |
| Casting Method | Investment precision casting, CNC machine | | | | | | |
| Application | Oil, Water, Industrial, Chemical | | | | | | |
| Test pressure | Usually 150PSI | | | | | | |
| Package | pcs/polybag, polybag/carton, cartons/pallet or according to your requirement | | | | | | |
| Advantages | 1.OEM and Customized service can be provided | | | | | | |
| | With experience, quality guaranteed | | | | | | |
| navaniayes | 3. Approved by ISO9001:2015 | | | | | | |
| | 4. With independent open mold capacity, OEM supposed | | | | | | |

Technology/ Technical Data Sheets

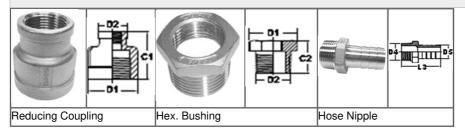

| SIZE | | C1 | C2 | SIZE | | C1 | C2 |
|------|-----------|----|----|--------|-------------|----|------|
| D1 | D2 | | 02 | D1 | D2 | C1 | 02 |
| 1/8" | - | - | - | 1-1/4" | 1/8"-1 | 44 | 26 |
| 1/4" | 1/8" | 27 | 18 | 1-1/2" | 1/8"-1-1/4" | 48 | 29.5 |
| 3/8" | 1/8"-1/4" | 34 | 19 | 2" | 1/8"-1-1/2" | 56 | 32 |
| 1/2" | 1/8"-3/8" | 36 | 22 | 2-1/2" | 1/8"-2" | 62 | 36.5 |
| 3/4" | 1/8"-1/2" | 35 | 24 | 3" | 1/8"-2-1/2" | 67 | 37.5 |
| 1" | 1/8"-3/4" | 40 | 27 | 4" | 1/8"-3" | 76 | 42 |

Production Process

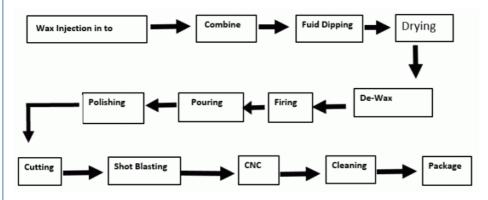

Common used Material Grade

SS316 Chemical Composition

ASTM A351 CF8M, SS316 Chemical Composition in %

| ASTM A351 CF8M, SS316 Chemical Composition in % | | | | | | | | | |
|---|-------|-------|-------|-------|-------|------|------|------|--|
| C Mn P S Si Ni Cr Mo | | | | | | | | | |
| Min. | | | | | | 9.0 | 18.0 | 2.00 | |
| Max. | 0.080 | 1.500 | 0.040 | 0.040 | 1.500 | 12.0 | 21.0 | 3.00 | |

SS316 Mechanical Properties of the Fittings at room temperature

| | | Upper Yield Point ReH (N/mm2) min. | | Hardness Test (HRB) |
|------|-----|---------------------------------------|----|------------------------|
| Min. | 485 | 205 | 30 | |
| Max. | | | | 80 |

SS304 Chemical Composition

| ASTM A351 CF8, SS304 Chemical Composition in % | | | | | | | | | |
|--|-------|-------|-------|-------|-------|------|------|------|--|
| C Mn P S Si Ni Cr Mo | | | | | | | | | |
| Min. | | | | | | 8.0 | 18.0 | | |
| Мах. | 0.080 | 1.500 | 0.040 | 0.040 | 2.000 | 11.0 | 21.0 | 0.50 | |

SS304 Mechanical Properties of the Fittings at room temperature

| | | | Elongation at rupture | |
|---------|------------------|-----------------------|-----------------------|---------------|
| SS304/S | Tensile Strength | Upper Yield Point ReH | A5 | Hardness Test |
| S304L | Rm (N/mm2) | (N/mm2) min. | (%) | (HRB) |
| | | | min. | |
| Min. | 485 | 205 | 35 | |
| Max | | | | |

Application/ Usage:

Threaded pipe fittings are commonly used in Water gas pipes, small diameter water pipes, compressed air pipes and lowpressure steam pipes.

SHIJIAZHUANG DEYE PIPING INDUSTRY CO., LTD Pipefittings Department)







piping-industry.com

No. 368 Youyi St. Shijiazhuang, Hebei, China